


# MAX-FAN 280 - 2360

## TECHNICAL DATASHEET

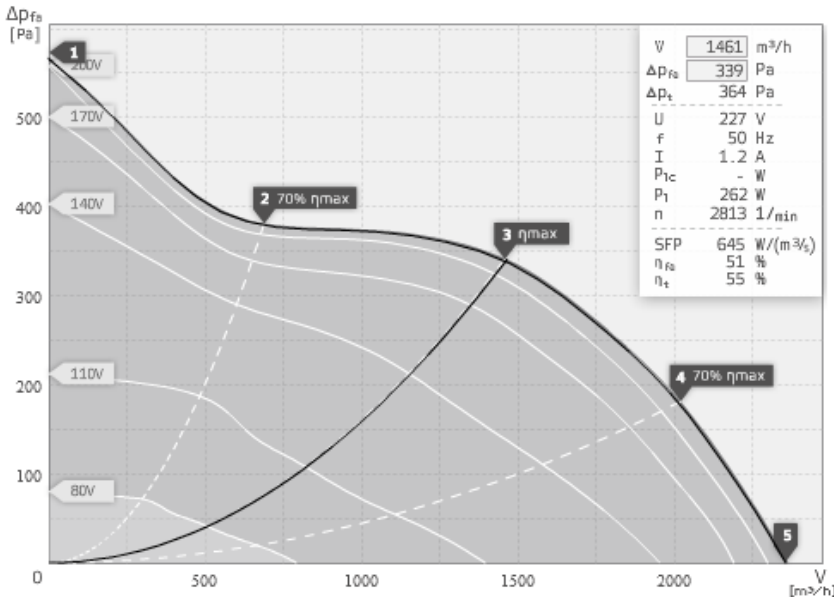

- Diagonal impeller with stator
- Galvanized metal housing
- Speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	1,1	0,9	1,2	1,2	1,1
Power Consumption P1	W	242	198	263	273	250
RPM n	1/min	2862	2888	2819	2813	2838
SPL inlet LWA5	dB(A)	80	77	75	76	79
SPL outlet LWA6	dB(A)	84	81	79	81	82
SPL casing break out LWA2	dB(A)	64	62	57	56	58

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	74	-	49	63	68	69	69	66	57
Outlet	LWA6	79	-	50	69	73	75	72	66	58
Casing	LWA2	57	-	44	46	49	52	51	49	45

EL 280 E2 02 | 115334

Voltage UN	230 V 1~
Current Imax	1,6
Ambient Temperature tA	55 °C
Medium Temperature tM	55 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	8,3 kg

