


# MAX-FAN 560 - 9550

## TECHNICAL DATASHEET

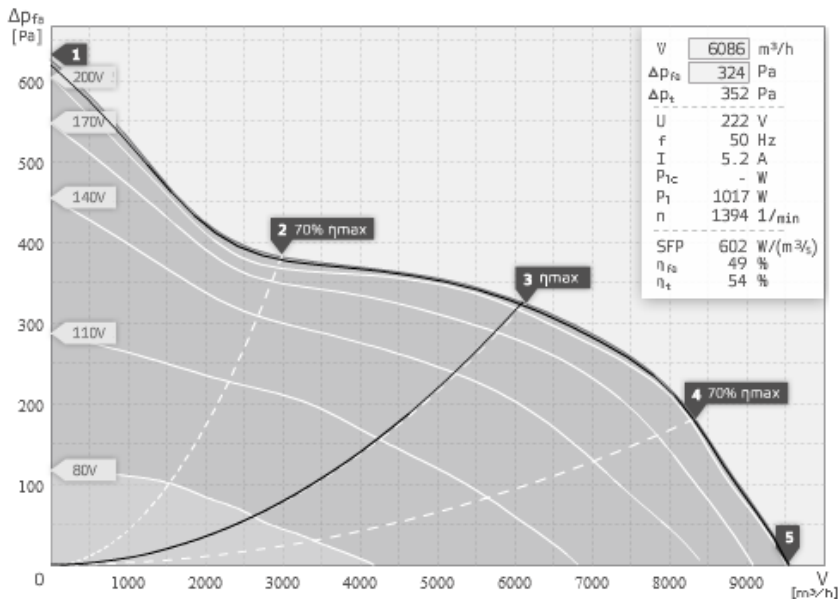

- Diagonal impeller with stator
- Casing of aluminium
- Speed controllable
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	5,2	4,4	5,2	5,5	5
Power Consumption P1	W	1032	844	1035	1108	1002
RPM n	1/min	1391	1426	1401	1388	1406
SPL inlet LWA5	dB(A)	88	86	83	84	88
SPL outlet LWA6	dB(A)	92	89	87	86	89
SPL casing break out LWA2	dB(A)	82	81	79	79	81

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	82	-	67	76	77	76	75	68	58
Outlet	LWA6	85	-	71	80	83	78	75	70	60
Casing	LWA2	78	-	67	75	74	67	64	58	50

EL 560 E4 01   119349	
Voltage UN	230 V 1~
Current Imax	7,6
Ambient Temperature tA	80 °C
Medium Temperature tM	80 °C
Speed Control	V
Motor Protection	TAO
Isolation Class	F
Weight	38 kg

