


RK 125 LS - 370 m³/h

TECHNICAL DATASHEET

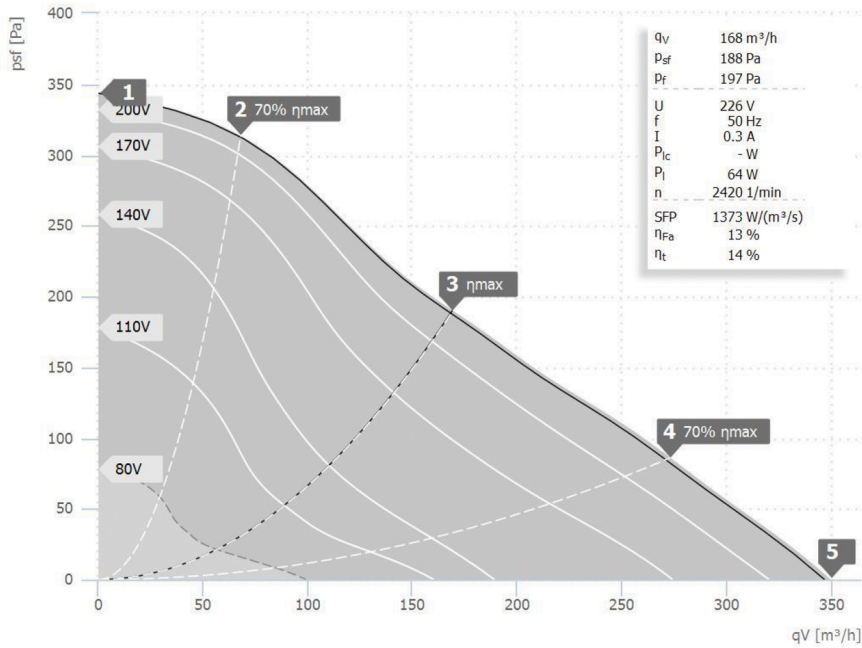

- Backward curved centrifugal fan
- Plastic housing PA6, RAL 7035
- Speed controllable
- Integrated thermostatic switch
- Incl. terminal box

Operating Point		1	2	3	4	5
Current I	A	0,3	0,3	0,3	0,3	0,3
Power Consumption P ₁	W	61	61	65	68	68
RPM n	1/min	2734	2686	2432	2313	2316
SPL inlet L _{WA5}	dB(A)	64	64	64	65	67
SPL outlet L _{WA6}	dB(A)	63	63	63	63	65
SPL casing break out L _{WA2}	dB(A)	51	51	51	52	55

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	64	34	45	56	60	58	57	52	43
Outlet	L _{WA6}	63	33	46	58	56	53	55	51	42
Casing	L _{WA2}	51	33	33	42	39	47	46	35	24

RK 125L 104508	
Voltage U _N	230 V 1~
Current I _{max}	0,3
Ambient Temperature t _A	55 °C
Medium temperatures t _M	55 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	2,2 kg

