


# ISOMAX 315 - 3260

## TECHNICAL DATASHEET

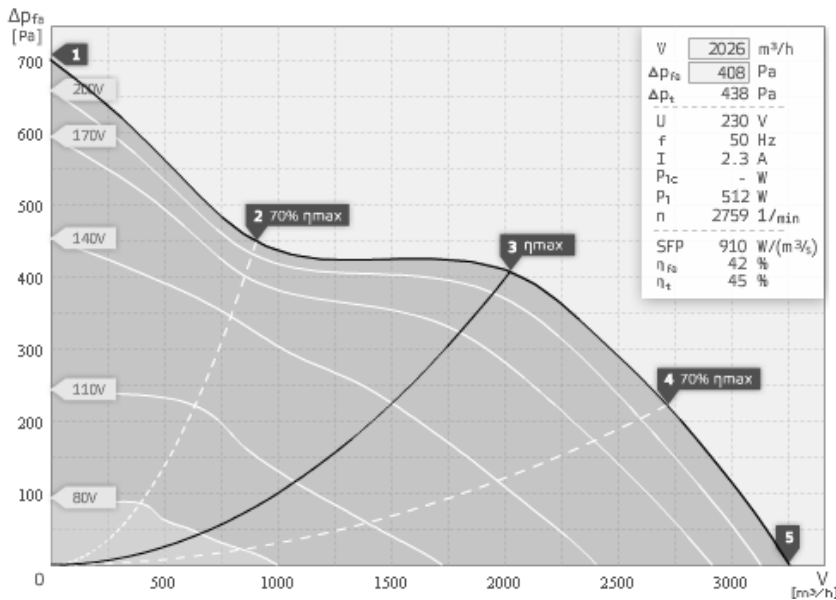

- ETALINE sound insulated
- Galvanized metal housing
- Speed controllable
- Integrated thermal switch
- With mounting brackets for hanging

Operating Point		1	2	3	4	5
Current I	A	2	1,6	2,3	2,4	2,3
Power Consumption P1	W	449	362	512	534	510
RPM n	1/min	2795	2854	2759	2749	2772
SPL inlet LWA5	dB(A)	81	78	77	78	81
SPL outlet LWA6	dB(A)	84	82	80	83	83
SPL casing break out LWA2	dB(A)	65	65	61	62	63

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	77	40	57	73	72	70	66	64	56
Outlet	LWA6	80	43	58	72	75	76	72	62	55
Casing	LWA2	61	46	48	52	55	57	54	49	38

ELIX 315 E2 01   121199	
Voltage UN	230 V 1~
Current Imax	3,2
Ambient Temperature tA	70 °C
Medium Temperature tM	70 °C
Speed Control	V
Motor Protection	TAO
Isolation Class	F
Weight	19,2 kg

