


CERAMIC METAL HALIDE CMH315T38/UVC/U/930 II

PERFORMANCE DATA

Initial lumens at rated watts after 100 hours operation	32500	Lm
Rated average life	10% failure @12000hrs	
Correlated color temperature	3100	K
Color rendering index	90	
Operating Position	U	
PAR Value	575	μmol/s

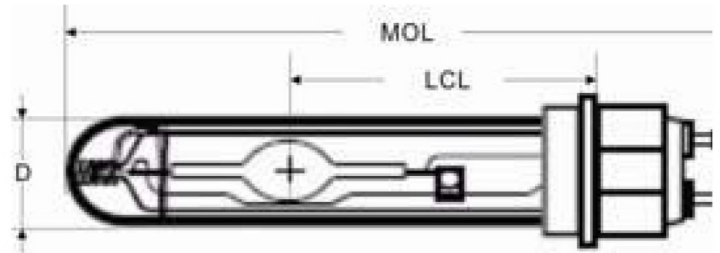



ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	315	W
Nominal lamp voltage	100	V
Nominal lamp current	3.15	A

PHYSICAL DESCRIPTION

Maximum overall length	193	mm
Light center length	89	mm
Bulb diameter	39	mm
Outer Bulb designation	T38	
Bulb material	UV block quartz	
Arc tube material	PCA	
Outer Bulb material	Quartz	
Base designation	PGZX18	


Typical lumen maintenance

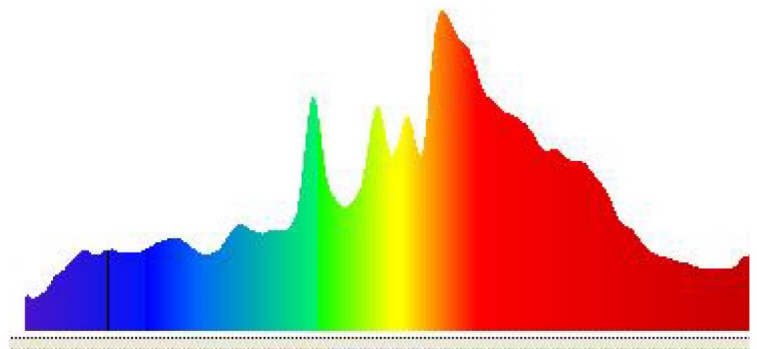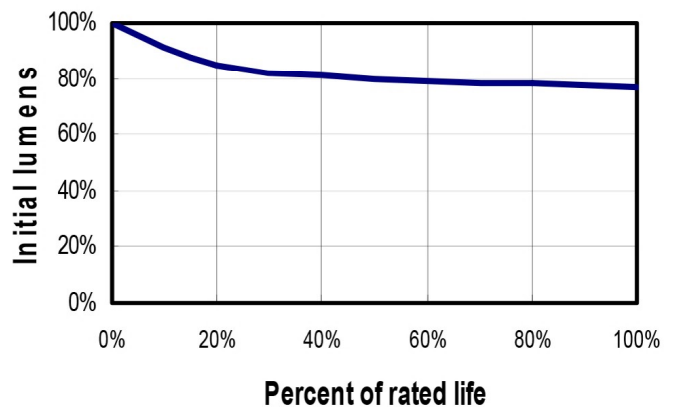

CERAMIC METAL HALIDE CMH315T38/UVC/U/942 II

PERFORMANCE DATA


Initial lumens at rated watts after 100 hours operation	33000	Lm
Rated average life	10% failure @12000hrs	
Correlated color temperature	4000	K
Color rendering index	95	
Operating Position	U	
PAR Value	540	μmol/s

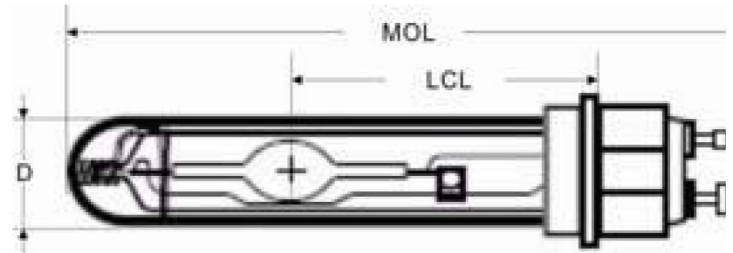

ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	315	W
Nominal lamp voltage	100	V
Nominal lamp current	3.15	A

Typical lumen maintenance

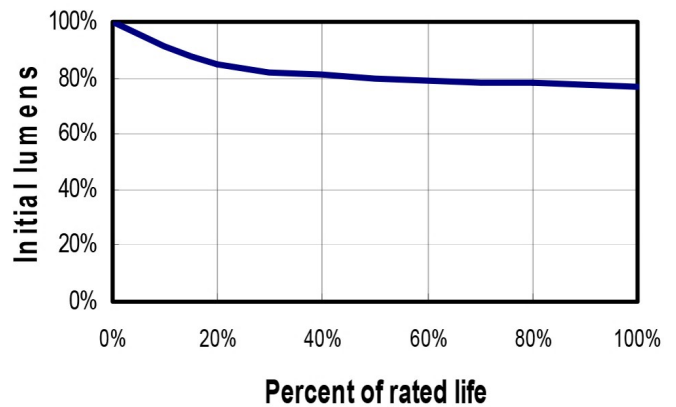

PHYSICAL DESCRIPTION

Maximum overall length	193	mm
Light center length	89	mm
Bulb diameter	38	mm
Outer Bulb designation	T38	
Bulb material	UV block quartz	
Arc tube material	PCA	
Outer Bulb material	Quartz	
Base designation	PGZX18	

