




Q-Max EC 355 - 3247 m³/h

TECHNICAL DATASHEET

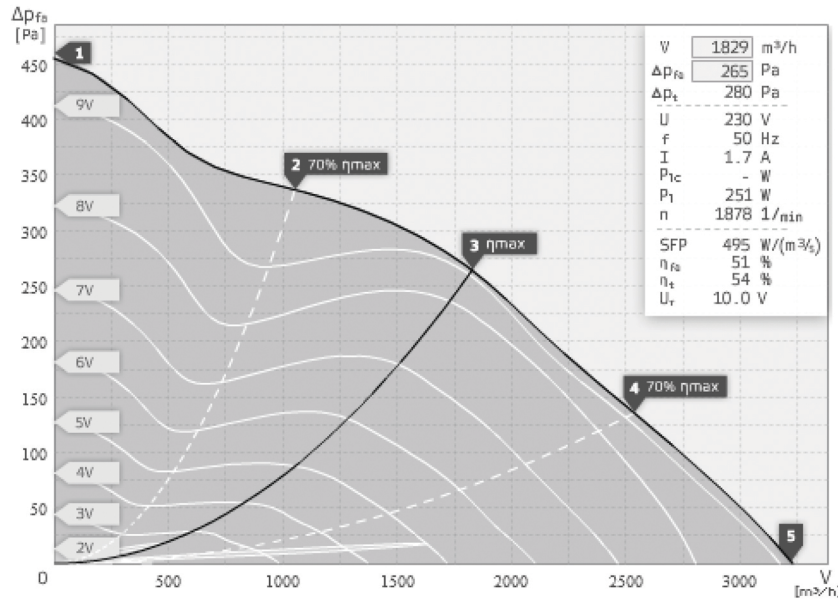

- with integrated diagonal fan ETAMASTER
- Sound insulated metal casing
- EC-motor
- Variable speed control
- Integrated electronic

Operating Point		1	2	3	4	5
Current I	A	1,7	1,8	1,7	1,7	1,7
Power Consumption P1	W	257	266	251	252	260
RPM n	1/min	2090	2230	1878	1897	2027
SPL inlet LWA5	dB(A)	75	72	71	70	72
SPL outlet LWA6	dB(A)	75	74	73	72	75
SPL casing break out LWA2	dB(A)	58	59	57	56	58

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	71	36	52	66	65	62	64	62	53
Outlet	LWA6	72	42	57	66	70	65	60	58	48
Casing	LWA2	56	34	38	48	55	46	39	37	30

Q-Max EC 355, 3247 132241	
Voltage UN	230 V 1~
Current I _{max}	1,9
Ambient Temperature t _A	35 °C
Medium Temperature t _M	35 °C
Speed Control	0-10V
Motor Protection	TEC
Isolation Class	F
Weight	0 kg

